


Specification	
Fluid	
Press.	MPa
Temp.	℃

Size	L	H	H ₁	H ₂	H ₃	W	E	Flange JIS 10K RF (mm)					
								D	C	g	f	t	n-h
65A	680	530	260	100	96	300	254	175	140	116	2	22	4-19
80A	680	530	260	100	96	300	254	185	150	126	2	22	8-19

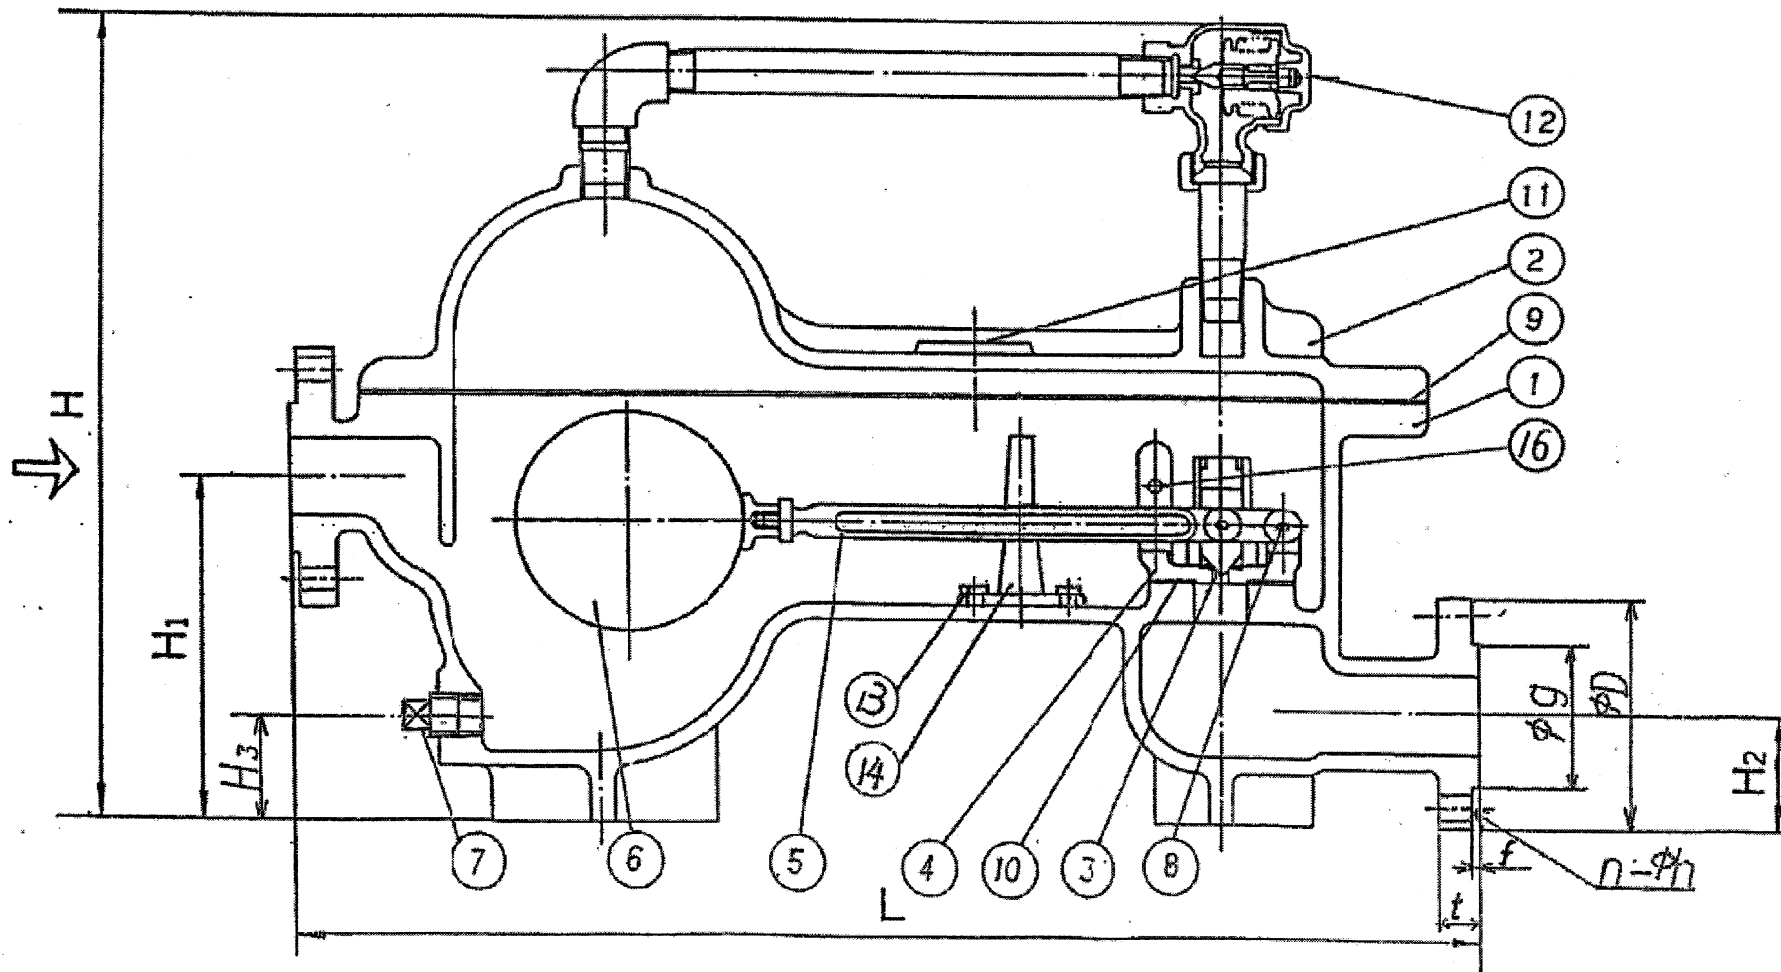

16	Stopper Pin	Brass	ストッパーピン	C3604	1
15	Bolt	Carbon Steel	ボルト	SCM435	18
14	Lever Guide	Bronze	レバーガイド	CAC406	1
13	Bolt	Rolled Steel	ボルト	SS400	2
12	Air Vent	Bronze	空気抜弁	CAC406	1
11	Name Plate	Brass	銘板	C2801	1
10	Gasket	Non-Asbestos	ガスケット	Non-Asbestos	1
9	Gasket	Non-Asbestos	ガスケット	Non-Asbestos	1
8	Pin	Brass	ピン	C3604	2
7	Plug	Carbon Steel	プラグ	S15C	1
6	Float	Brass	フロート	C2720	1
5	Lever	Bronze	レバー	CAC406	1
4	Seat	Bronze	弁座	CAC406	1
3	Valve	Bronze	弁体	CAC406	1
2	Cover	Ductile Cast Iron	ふた	FCD450	1
1	Body	Ductile Cast Iron	本体	FCD450	1
No.	Name of Parts	Material	部品名	材質	Q. TY

TYPE TF-1 STEAM TRAP
スチームトラップ

Approval	H. Iwamoto
Check	Y. Aoyama
Drawing	H. Okumura
Drawing No.	Y-060-6106-1A
Date	4 FEB. 2014

Yoshitake
INC.