


製品仕様図

HSA-R

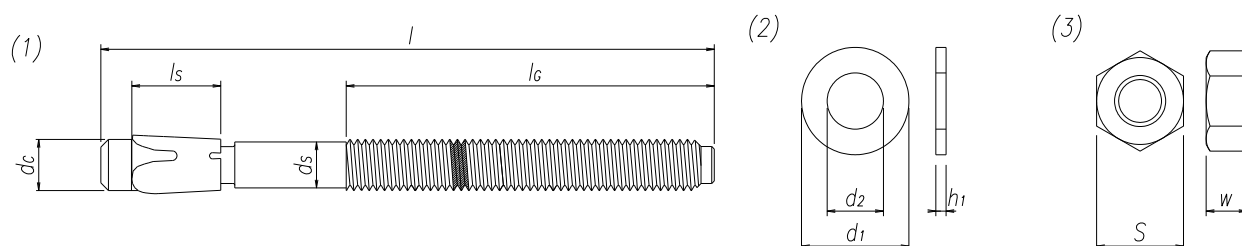

(1) アンカー本体

[単位: mm]

品名	全長 l_s	ねじ部 長さ l_G	本体径 d_s	先端部径 d_c	ウェッジ 部長さ l_s	ヘッドマ ーキング
HSA-R M6 5/-/-	50	15	5.2	6.0	8.1	<u>z</u>
HSA-R M6 20/10/-	65	30	5.2	6.0	8.1	<u>w</u>
HSA-R M6 40/30/10	85	50	5.2	6.0	8.1	<u>s</u>
HSA-R M6 55/45/25	100	65	5.2	6.0	8.1	<u>p</u>
HSA-R M8 5/-/-	55	17	7.0	8.2	13.6	<u>z</u>
HSA-R M8 20/10/-	70	32	7.0	8.2	13.6	<u>w</u>
HSA-R M8 35/25/-	85	47	7.0	8.2	13.6	t
HSA-R M8 55/45/15	105	67	7.0	8.2	13.6	<u>p</u>
HSA-R M8 80/70/40	130	92	7.0	8.2	13.6	<u>k</u>
HSA-R M10 5/-/-	68	19	8.8	10.0	16.0	<u>z</u>
HSA-R M10 20/10/-	83	34	8.8	10.0	16.0	<u>w</u>
HSA-R M10 35/25/-	98	49	8.8	10.0	16.0	t
HSA-R M10 50/40/10	113	64	8.8	10.0	16.0	<u>q</u>
HSA-R M10 70/60/30	133	84	8.8	10.0	16.0	m
HSA-R M10 90/80/50	153	104	8.8	10.0	16.0	i
HSA-R M12 5/-/-	85	22	10.7	12.0	19.0	<u>z</u>
HSA-R M12 20/5/-	100	37	10.7	12.0	19.0	<u>w</u>
HSA-R M12 35/20/-	115	52	10.7	12.0	19.0	t

2021年7月

品名			全長 l_s	ねじ部 長さ l_G	本体径 d_s	先端部径 d_c	ウェッジ 部長さ l_s	ヘッドマ ーキング
HSA-R	M12	65/50/15	145	82	10.7	12.0	19.0	n
HSA-R	M12	95/80/45	175	112	10.7	12.0	19.0	h
HSA-R	M12	125/110/75	205	142	10.7	12.0	19.0	c
HSA-R	M12	145/130/95	225	162	10.7	12.0	19.0	a
HSA-R	M16	5/-/-	102	26	14.5	15.9	24.6	z
HSA-R	M16	20/5/-	117	41	14.5	15.9	24.6	w
HSA-R	M16	40/25/-	137	61	14.5	15.9	24.6	s
HSA-R	M16	85/70/30	182	106	14.5	15.9	24.6	j
HSA-R	M16	135/120/80	232	156	14.5	15.9	24.6	a
HSA-R	M20	10/-/-	125	36	18.2	19.9	28.3	y
HSA-R	M20	55/30/15	170	81	18.2	19.9	28.3	p

(2)~(3) ワッシャー、ナット

[単位: mm]

呼び	(2) 平ワッシャー DIN 125			(3) 六角ナット DIN 934	
	外径	内径	厚さ	二面幅	厚さ
	d_1	d_2	h_1	S	W
M6	12.0	6.4	1.6	10.0	5.0
M8	16.0	8.4	1.6	13.0	6.5
M10	20.0	10.5	2.0	17.0	8.0
M12	24.0	13.0	2.5	19.0	10.0
M16	30.0	17.0	3.0	24.0	13.0
M20	37.0	21.0	3.0	30.0	16.0

2021年7月