
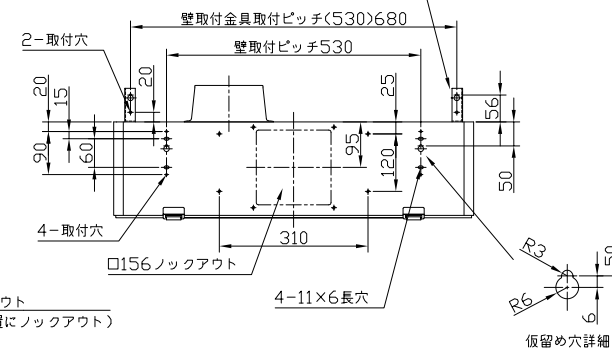
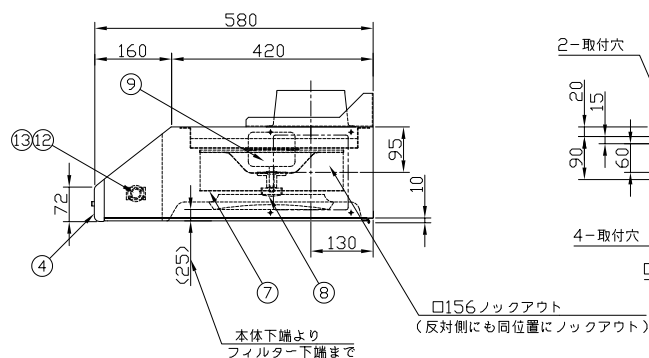
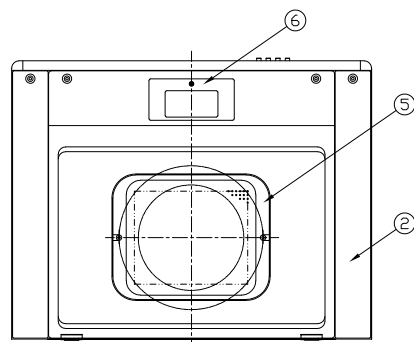
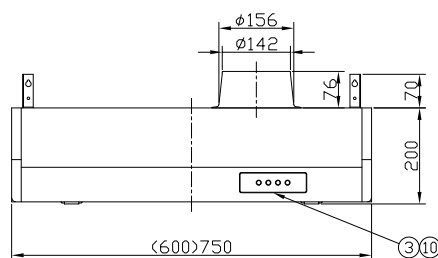


[illegible]

The graph plots static pressure (Pa) on the y-axis (0 to 400) against wind volume (m³/h) on the x-axis (0 to 800). It shows curves for different wind speeds (50Hz solid lines, 60Hz dashed lines) and distances (5m, 10m, 15m, 20m). The curves are labeled '強' (strong) and '弱' (weak). A diagonal line represents the relationship between wind speed and wind volume.

入力電圧 (V)	100	
周波数 (Hz)	50/60	
風量調節	強	弱
消費電力 (W)	72/85	51/52
風量 (m ³ /h)	540/540	380/350
騒音 (dB)	44/45	35/35
質量 (kg)	600㎫/13 750㎫/16	
時間定格	連続	
電動機定格	4極コンデンサ一誘導	
電動機絶縁種別	E種	
巻線温度上昇	75K以下	
基準周囲温度	-5~40℃	
絶縁抵抗	1MΩ以上 (DC500V)	
耐電圧	AC1000V 1分間	

番号	部 品 名	材 質	数量	備 考
1	本体	亜鉛めっき鋼板	1	粉体焼付塗装 指定色
2	閉じ板	亜鉛めっき鋼板	(0)2	粉体焼付塗装
3	銘板	ポリカーボネート	1	－
4	サイドキャップ	ABS樹脂	2	－
5	バンチングフィルター	アルミウム	1	－
6	ランプカバー	亜鉛めっき鋼板	1	粉体焼付塗装
7	ファン	亜鉛めっき鋼板	1	－
8	スピナー	アルミダイキャスト	1	－
9	モーター	－	1	4極コンデンサー誘導
10	スイッチ	－	1	4連押釦
11	電源コード	－	1	2芯 機外長1m以上
12	レセプタクル	－	1	口金 E17
13	LED電球	－	1	電球色

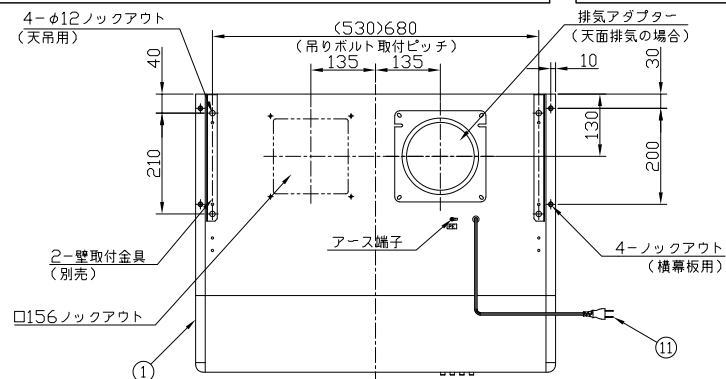

- ・取扱説明書(1部)
- ・取付設置説明書(1部)
- ・取付ビスセット(1セット)
- ・排気アダプター(1セット)
- ・塞ぎ板(1枚)

名称 NAME	ターボファン外観図		
作成日 DWG. DATE	2024/08/06	機種名 MODEL	WFT-601/751A
改訂日 REV. DATE		図番 DWG. No.	40569000
改訂No. REV. NO.	0		
三角放 THIRD ANGLE	 株式会社 渡辺製作所 WATANABE CO.,LTD.		

※ 仕様は場合により変更することがあります